

Lecture 18: Transport Layer Protocols (Layer 4)

Prof. Mohammed Hawa
Electrical Engineering Department
The University of Jordan

EE426: Communication Networks

Transport Layer Functions


- **Demultiplexing:** allow multiple application programs on any given host to simultaneously communicate using one host IP address.
- **Divide** large messages into smaller finite-size segments.
- **Reliable end-to-end transmission:** Retransmit dropped segments, re-arrange out-of-order segments, and neglect duplicate segments.
- **Flow control:** prevent the sender from overrunning the capacity of the receiver.
- **Congestion control:** throttle senders to avoid too much data from being injected into the network, thereby causing switches or links to become overloaded.

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan

2

Multiplexing: TCP/UDP Ports

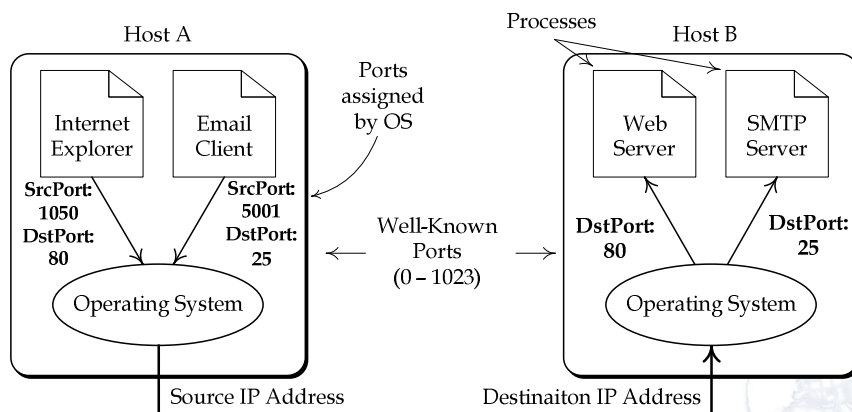

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan

3

User Datagram Protocol (UDP)


- The simplest possible transport protocol that runs on top of IP.
- Allows applications to send IP datagrams without having to establish a connection.
- Described in RFC 768.
- UDP adds a level of process demultiplexing at the source and destination hosts through port numbers.
- Aside from this, UDP adds no other functionality to the best-effort service provided by the underlying IP network.

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan


4

UDP Segment Format

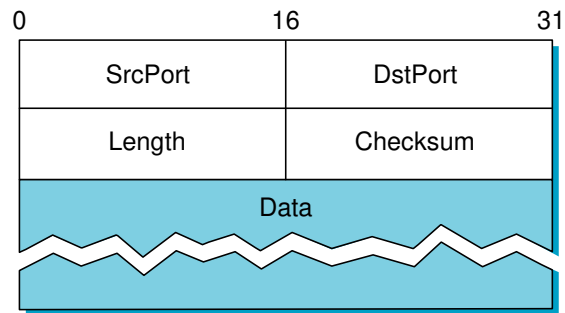


Transmission Control Protocol (TCP)

- TCP provides a reliable, full-duplex, point-to-point connection-oriented byte stream transport service on top of IP.

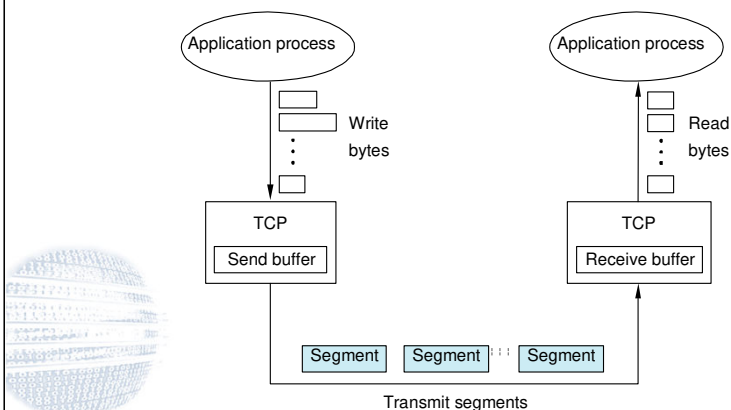

TCP Segment Format

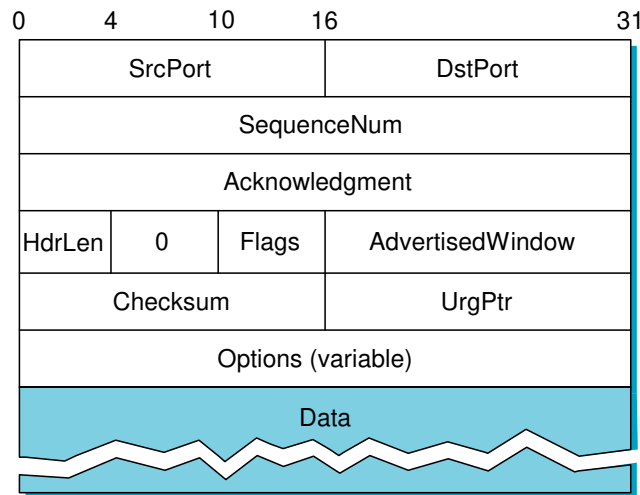

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan

7

Reliable Delivery of Segments

- Automatic Repeat Request (ARQ):
 1. Stop-and-Wait
 - 2A. Sliding Window – Selective Repeat
 - 2B. Sliding Window – Go Back N

1. Stop-and-Wait Algorithm, also called Alternating Bit Protocol (ABP):

After transmitting one segment, the sender waits for an acknowledgment before transmitting the next segment. If the acknowledgment does not arrive after a certain period of time, the sender times out and retransmits the original segment.


Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan

8

Stop-and-Wait Algorithm [3]

- One bit is enough for sequence number.
- Simple algorithm.
- Wasted time, especially if $RTT \gg TRANS$

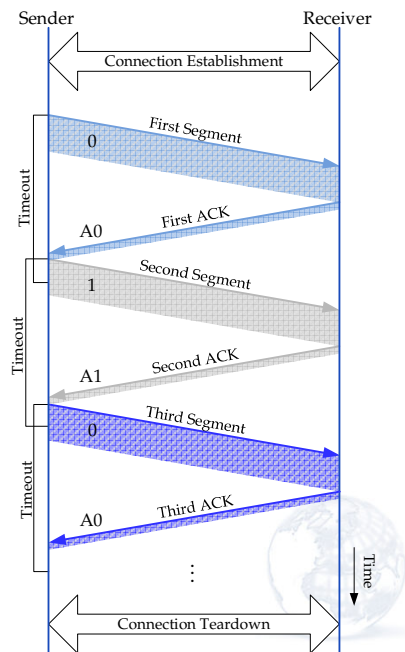


Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan 11

Sliding Window

- Transmit more segments while waiting for ACKs.
- More efficient in utilizing link capacity.
- More complex algorithm.

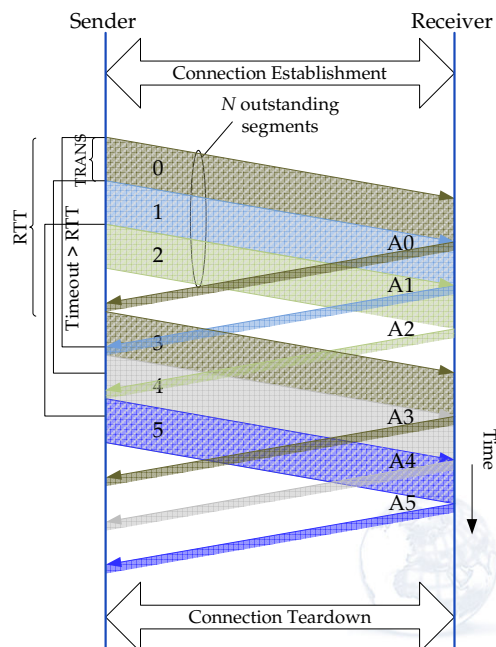

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan 12

Sliding Window Algorithm - Sender

- In the Sliding Window algorithm, the sender assigns a sequence number, denoted SeqNum, to each segment.
- The sender maintains three variables:
 - **Send Window Size (SWS):** gives the upper bound on the number of outstanding (unacknowledged) segments that the sender can transmit.
 - **Last Acknowledgment Received (LAR):** denotes the sequence number of the last acknowledgment received.
 - **Last Segment Sent (LSS):** denotes the sequence number of the last segment sent.




Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan 13

Sliding Window Algorithm - Sender

- The sender also maintains the following invariant:

$$LSS - LAR \leq SWS$$

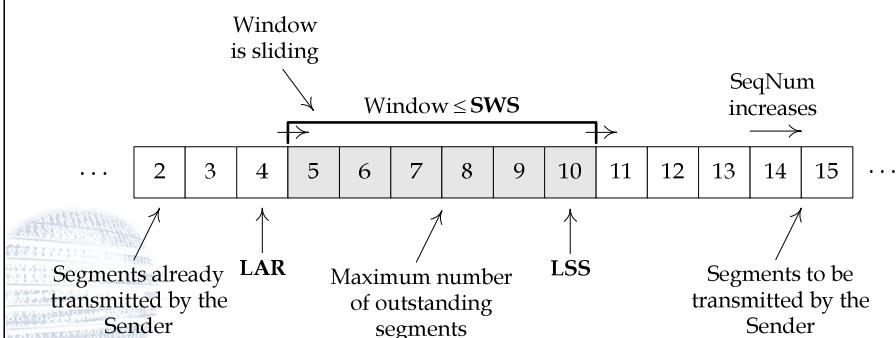

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan 14

Sliding Window Algorithm - Receiver

- The receiver maintains the following three variables:
 - **Receive Window Size (RWS):** gives the upper bound on the number of out-of-order segments that the receiver is willing to accept.
 - **Next Segment Expected (NSE):** denotes the sequence number of the next segment expected to arrive based on the correct order.
 - **Last Acceptable Segment (LAS):** denotes the sequence number of the largest acceptable out-of-order segment.


Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan 15

Sliding Window Algorithm - Receiver

- The receiver also maintains the following invariant:

$$\text{LAS} - \text{NSE} + 1 \leq \text{RWS}$$

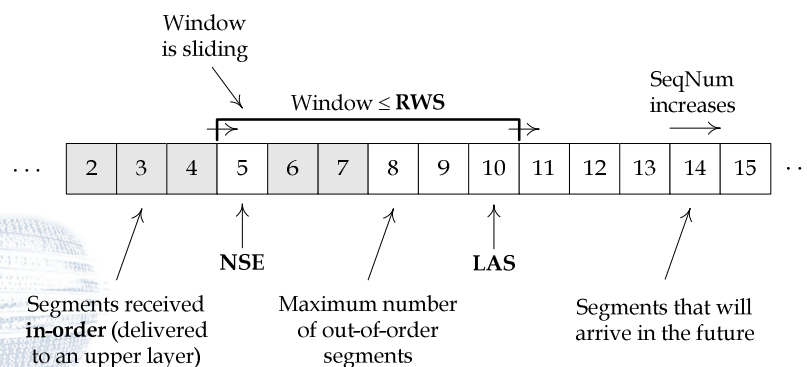

Copyright © Prof. Mohammed Hawa

Electrical Engineering Department, University of Jordan 16


Sliding Window Algorithm

- When a frame with sequence number SeqNum arrives:
 - If $\text{SeqNum} < \text{NSE}$ or $\text{SeqNum} > \text{LAS}$, segment is discarded. An ACK is sent to the sender anyway.
 - If $\text{NSE} \leq \text{SeqNum} \leq \text{LAS}$, segment is accepted. The receiver then sends a cumulative ACK, which acknowledges the largest sequence number not yet acknowledged. Sets:
 - $\text{NSE} = \text{SeqNumToAck} + 1,$
 - $\text{LAS} = \text{SeqNumToAck} + \text{RWS}.$




Sliding Window Variants


- **2.A. Selective Repeat:** When a timeout happens (or three duplicate ACKs arrive) indicating that a segment is lost, the sender retransmits that lost segment only. After that, the sender continues to send segments normally (if the SWS allows that). This is the required behavior if $\text{RWS} = \text{SWS}$.
- **2.B. Go Back N:** When a timeout happens (or three duplicate ACKs arrive) indicating that a segment is lost, the sender retransmits that lost segment and all the following segments that have already been transmitted before continuing to send segments normally (if the SWS allows that). This is the required behavior if $\text{RWS} = 1$.




Example "Selective Repeat" Sliding Window

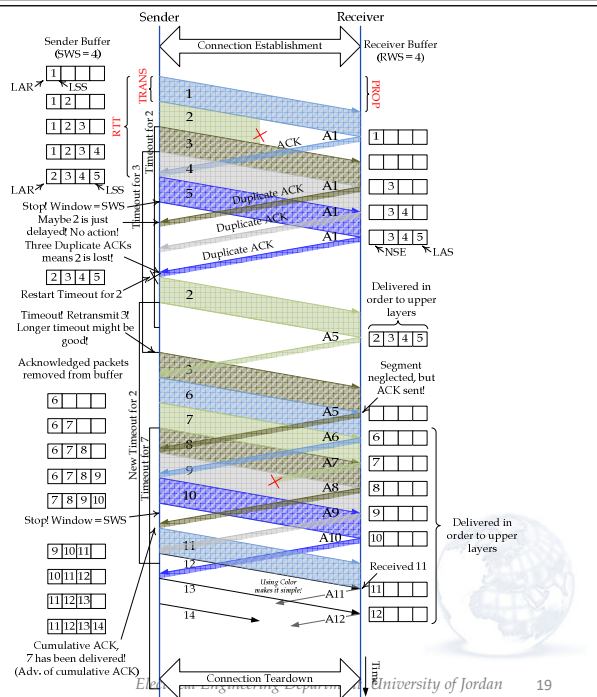

Example "Go Back N" Sliding Window

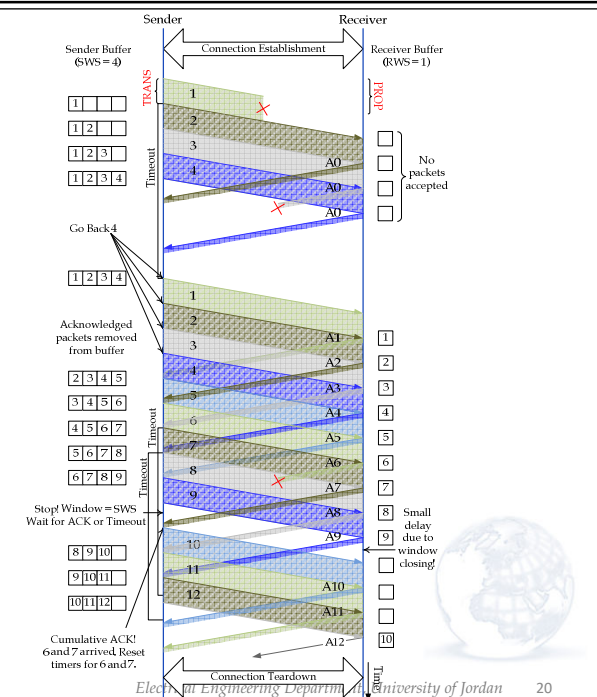

Reminder: TCP Segment Format

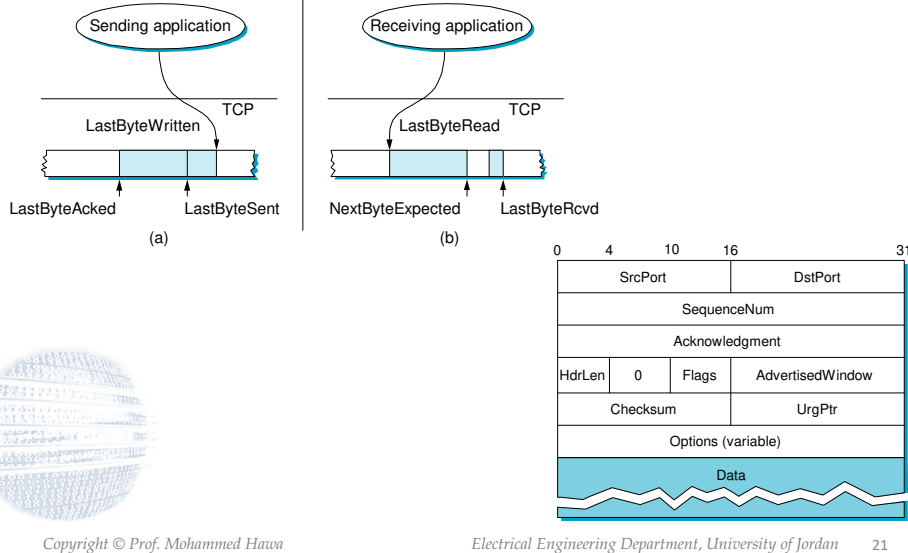

Finite Sequence Numbers

- In the Sliding Window Algorithm:
- It turns out that if $RWS = 1$ (i.e., Go Back N), then we need:

$$\text{MaxSeqNum} \geq \text{SWS} + 1$$

- However, if $RWS = \text{SWS}$ (i.e., Selective Repeat), then we need:

$$\text{MaxSeqNum} \geq 2 \text{SWS} - 1$$



TCP Connection Establishment (establishing a socket, Winsock)

